


# RUBINETTI A SFERA


## BALL TAP

### CARATTERISTICHE TECNICHE PRINCIPALI - MAIN TECHNICAL FEATURES

 MATERIALI DI COSTRUZIONE:  
OTTONE NICHELATO/OTTONE (EN12164-CW614N) -  
SFERA IN P.T.F.E. - VITE IN ACCIAIO - LEVA IN NYLON


PRESSIONE MAX D'ESERCIZIO:  
10 BAR (1 MPa)

TEMPERATURA DI LAVORO:  
-20°C (253K), +90°C (363K)

 CONSTRUCTION MATERIALS:  
NICKEL-PLATED BRASS/BRASS (EN 12164 - CW614N) -  
BALL SEAT IN P.T.F.E. - STAINLESS SCREW - NYLON HANDLE

MAX WORKING PRESSURE:  
10 BAR (1 MPa)

WORKING TEMPERATURE:  
-20°C (253K), +90°C (363K)

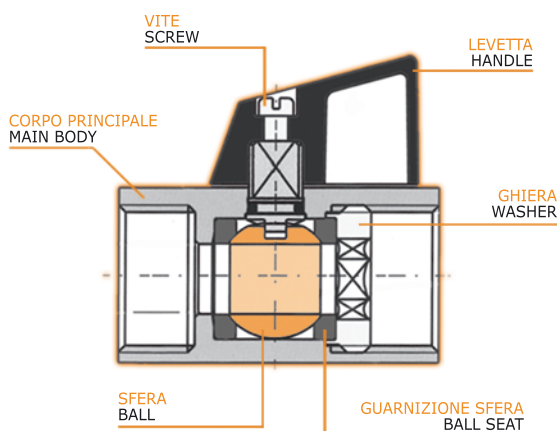

### O-RING/GUARNIZIONI - O-RING/RUBBER-GASKET

GUARNIZIONI IN GOMMA ANTIOLIO NBR - OIL-PROOF RUBBER PACKINGS NBR

### TIPOLOGIE DI ATTACCO FILETTATO - THREADED CONNETTOR TYPE

 CILINDRICO PARALLELO  
UNI-ISO 228/1 - UNI 5542-65

 CONICO TAPERED  
UNI EN 10226-1

 CILINDRICO FEMMINA  
FEMALE PARALLEL  
UNI-ISO 228/1

### CODIFICA RUBINETTI A SFERA - BALL TAP LINE CODING

SERIE ARTICOLO - SERIES

**RS\_\_ 08**

FILETTO - THREAD